
The following page(s) are extracted from multi-page Kuhnke product catalogues or CDRoms and any page number shown is relevant to the original document. The PDF sheets here may have been combined to provide technical information about the specific product(s) you have selected.

Hard copy product catalogues, and CDRoms have been published describing Kuhnke Pneumatics, Solenoids, Relays and Electronics; some divided into different books. A list of current publications is available on this web site or from our sales offices. Some may be available for download, but as substantially larger files.

Contact Details

Kuhnke sales and service in the UK

H. Kuhnke Ltd
Unit 6 Focus 303
Focus Way, Walworth Business Park
Andover
Hampshire
SP10 5NY
United Kingdom

Tel: +44 (0)1264 364194
Fax: +44 (0)1264 365991
Email: sales@kuhnke.co.uk

Important Note

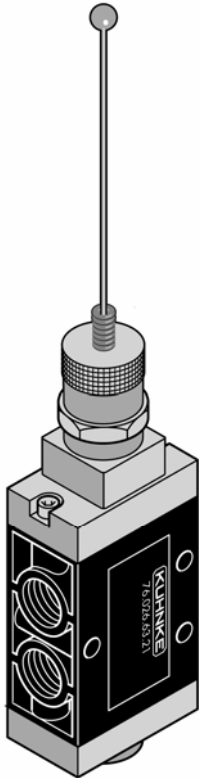
The information shown in these documents is for guidance only. No liability is accepted for any errors or omissions. The designer or user is solely responsible for the safe and proper application of the parts, assemblies or equipment described.

Mechanically Operated Valves






Misc. Operators

Kuhnke Power Valves

Antenna Valve, Air Pilot Assisted



Actuation is caused by deflection of spring supported 115mm wire. Can be used to detect passing items on conveyor belts. Allows valve to be mounted close to detected unit and provides a wiping action.

Description	Orifice (Body No.)	Port Size	Catalogue Number		
			Metric Ports Standard	NPT Ports (USA Std.)	
3/2 Norm. Closed Spring Return		6mm (9P)	1/8	76026-63-21	75026-63-21
3/2 Norm. Open Spring Return		6mm (9P)	1/8	76026-63-31	75026-63-31
3/2 Norm. Closed Spring Return		8mm (6P)	1/4	76046-63-21	75046-63-21
5/2 Spring Return (Spool Valve)		6mm (1mS)	1/8	76123-63-41	(Not Available)
52 Spring Return (Poppet Valve)		6mm (1mP)	1/8	76127-63-41	(Not Available)

Valve operating pressure range is 2.5-10 bar. Minimum pressure 2.5 bar. Actuation force @ 6 bar is approx. 4 N.

Body dimensions for 1/8 ported valves are 70mm L (3/2), 87mm L (5/2) x 35mm H x 20mm W. Approximate valve body dimensions for 1/4 ported valves are 120mm L x 50mm H x 25mm W.

Through body mounting holes 4.5mm.

For valve specifications see appendix. For detail dimensions contact factory.