

The following page(s) are extracted from multi-page Kuhnke product catalogues or CDROMs and any page number shown is relevant to the original document. The PDF sheets here may have been combined to provide technical information about the specific product(s) you have selected.

Hard copy product catalogues, and CDROMs have been published describing Kuhnke Pneumatics, Solenoids, Relays and Electronics; some divided into different books. A list of current publications is available on this web site or from our sales offices. Some may be available for download, but as substantially larger files.

## Contact Details

Kuhnke sales and service in the UK

H. Kuhnke Ltd  
Unit 21, Abbey Enterprise Centre  
Premier Way  
Romsey  
Hants  
SO51 9AQ

T: 01794 514445  
F: 01794 513514  
Email: [sales@kuhnke.co.uk](mailto:sales@kuhnke.co.uk)

### Important Note

The information shown in these documents is for guidance only. No liability is accepted for any errors or omissions. The designer or user is solely responsible for the safe and proper application of the parts, assemblies or equipment described.


---

# Miniature Solenoid Valves

## Series 83 – 5/2

Kuhnke Miniature Valves

### Resilient Seal Spool Valve, Sub Base Mounted

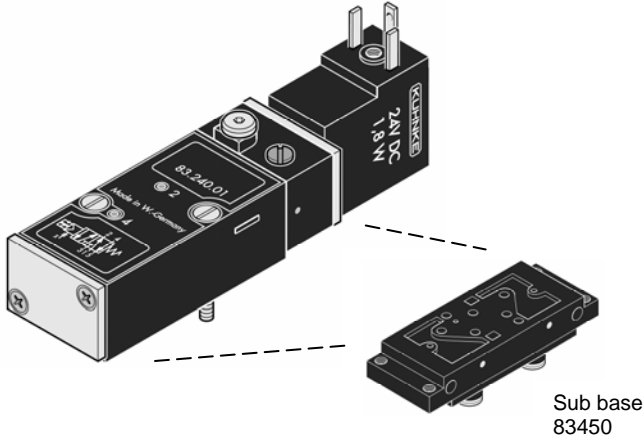

The Series 83 sub base mounted valve provides a simple answer to miniature 5/2 valving. The valve is constructed of a moulded body and utilises O-ring construction to provide a lightweight, durable alternative. The valve has red pop-up indicators to show position, as well as a manual override and an external air pilot supply port connection, used when switching pressures less than 2.5 Bar.


A special moulded sub base cat. no. **83450** has instant push in fittings for 4mm tubing and fully adjustable flow controls to provide a compact valve package. The Series 83 valve can also be mounted on a standard aluminum sub plate cat. no. **84402-01** or on standard manifolds for Series 84 valves, see accessories.

Description	Coil Type	Catalogue Number
<b>5/2 Single Solenoid Spring Return</b> 	AC	<b>83240-02-●</b> <i>(83230-02-●)</i>
	DC	<b>83240-01-●</b> <i>(83230-01-●)</i>
<b>5/2 Double Solenoid Detent</b> 	AC	<b>83244-02-●</b> <i>(83234-02-●)</i>
	DC	<b>83244-01-●</b> <i>(83234-01-●)</i>

● - Insert coil voltage required to complete catalogue number. Standard voltages are 12 and 24 VDC: 24, 110 and 230 VAC.

*Catalogue numbers in Italics are older design valves with 20mm coils. Not recommended for new installations.*

### Technical Specifications

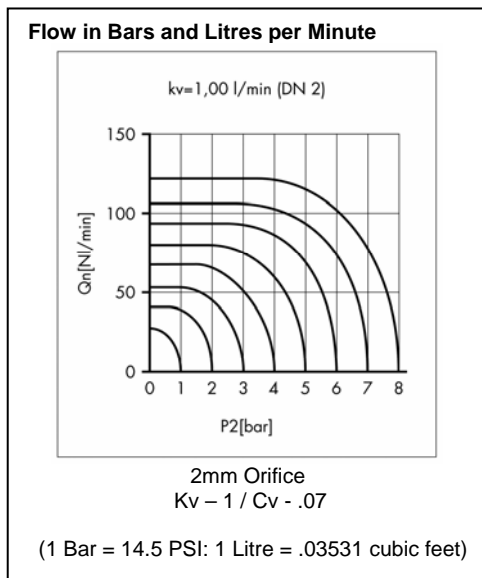

**Operating Pressure:**

2.5 to 8 Bar max.

**Vacuum:**

Not applicable.

**Flow Rate:**

See Flow Chart.

**Kv/Cv:**

Kv - 1.00

Cv - 0.07

**Orifice:**

2mm

**Connection:**

See sub base.

**Media:**

Filtered Air

**Coils:**

Encapsulated, earth connection standard.

**Power Consumption:**

DC: 1.8W / AC 5.5 VA

**Valve Operating Time:**

	AC	DC
Pick-up	4 ms	10 ms
Drop Out	3.5 ms	8 ms

**Dimensions (mm):**

	Single Solenoid	Double Solenoid
Height:	99	144
Width:	25	25
Depth:	26.5	26.5
Weight:	158g.	230g.

**Materials:**

Molded body, Buna N Seals, zinc end caps

**Average Mechanical Life:**

20 million operations

**Operating Ambient:**

-10°C to 60°C (12°F to 140°F)

**Operation:**

Air piloted system, supply pressure must be connected to port 1.